




PCIF BEARING LIMITED

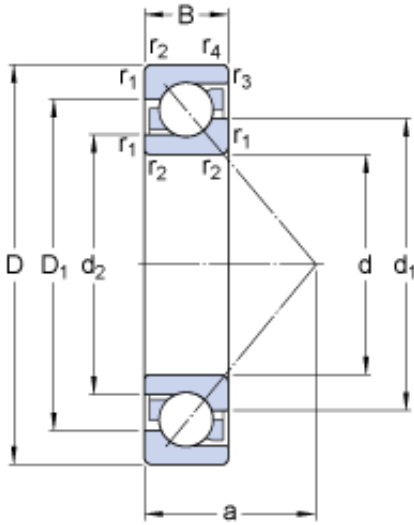

15 mm x 35 mm x 11 mm skf 7202 becbp bearing

Bearing No. 7202 becbp

7202 becbp Bearing 2D drawings and 3D CAD models

Size	35x15x11 mm
Bore Diameter	35 mm
Outer Diameter	15 mm
Width	11 mm
d	15 mm
D	35 mm
B	11 mm
d ₁	22.7 mm
d ₂	18.93 mm
D ₁	27.8 mm
a	16 mm
r _{1,2} - min.	0.6 mm
r _{3,4} - min.	0.3 mm
d _a - min.	19.2 mm
D _a - max.	30.8 mm
D _b - max.	32.6 mm
r _a - max.	0.6 mm
r _b - max.	0.3 mm
Basic dynamic load rating - C	8.8 kN
Basic static load rating - C ₀	4.6 kN
Fatigue load limit - P _u	0.196 kN
Reference speed	26000 r/min
Limiting speed	26000 r/min
Calculation factor - k _r	0.095



PCIF BEARING LIMITED

Calculation factor - k_a	1.4
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.048
EAN	7316576649707
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



PCIF BEARING LIMITED

Long Description	15MM Bore; 35MM Outside Diameter; 11MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7202 BECBP
Weight / LBS	0.099
Bore	0.591 Inch 15 Millimeter
Outside Diameter	1.378 Inch 35 Millimeter
Width	0.433 Inch 11 Millimeter
bore diameter:	15 mm
radial static load capacity:	4.65 kN
outside diameter:	35 mm
cage material:	Nylon
overall width:	11 mm
outer ring width:	11 mm
contact angle:	40 °
maximum rpm:	26000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	0.6 mm



PCIF BEARING LIMITED

radial dynamic load capacity:	8.8 kN
series:	72
d_1	22.7 mm
d_2	18.93 mm
D_1	27.8 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	19.2 mm
D_a max.	30.8 mm
D_b max.	32.6 mm
r_a max.	0.6 mm
r_b max.	0.3 mm
Basic dynamic load rating C	8.8 kN
Basic static load rating C_0	4.65 kN
Fatigue load limit P_u	0.196 kN
Calculation factor A	0.000383
Calculation factor k_r	0.095
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	0.045 kg